


9078DL


DuraLITE Vertical

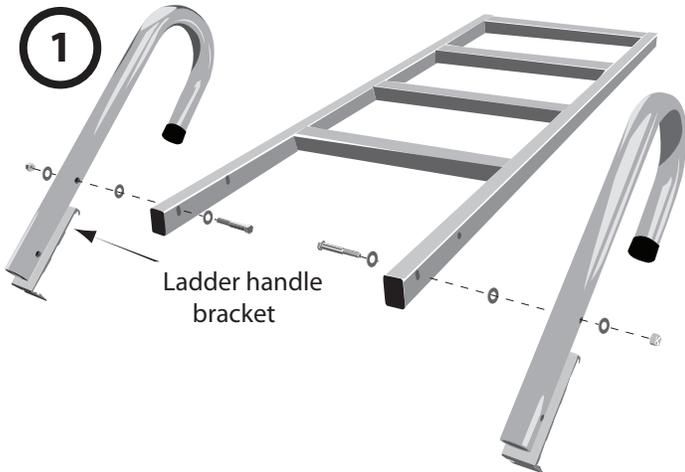

Connect the Ladder handle to the oblong holes with the ladder between each ladder handle. Use two hex bolts and nylock jam nuts from the ladder bolt kit bag.

Threaded ends of all bolts should point to the outside of the ladder to avoid the path of swimmers.


On each side, place a stainless washer between the handle and the ladder as well as a washer under the head of the bolt and one under the nut. These three washers are needed as spacers to allow the acorn nut to bottom out and become tight.

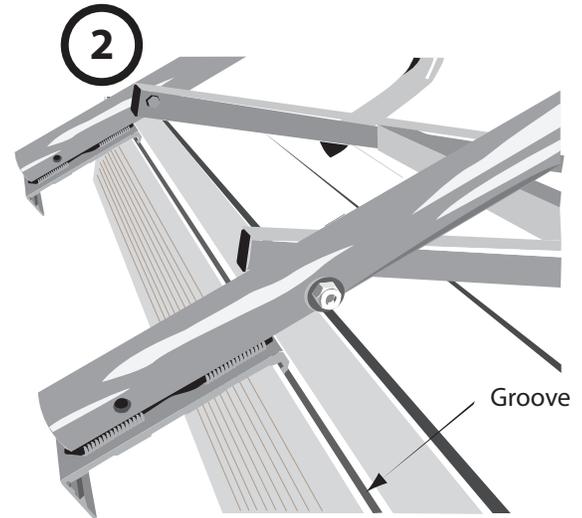

With the ladder assembled as shown in figure 2, you will be able to place the ladder handle brackets into the large groove located on the top edge of the DuraLITE dock frame.




Lay the assembled ladder on the dock in the flipped up position so you do not have to hold it while trying to attach it. Having it assembled will space the handles the right distance apart from each other.

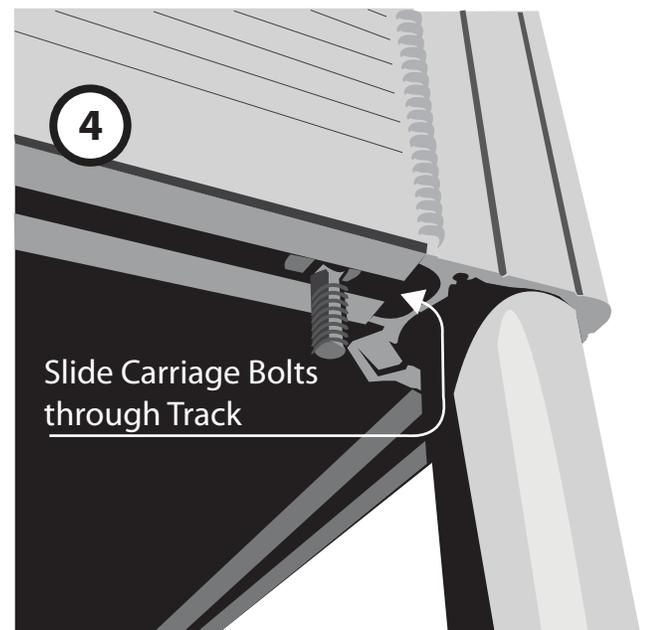

Slide two carriage bolts from the ladder bolt kit bag through the end of the track located on the bottom of the DuraLITE Frame.

The head of the bolt needs to be inserted at a 45° angle in order to fit through the opening. These two bolts are to secure the ladder hoops once they are attached.

5

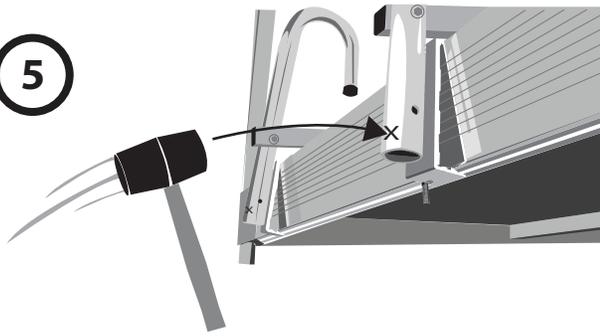


The ladder handle brackets have a notched opening that will accept the carriage bolts you placed in the track on step 4.

Make sure your bolts are slid to the notched side of the handle bracket before snapping the handle onto the dock frame.


To snap the handle bracket into place you can pull back on the top of the top of the handle while thumping on the lower part of the handle (marked X above) until you hear each handle click into the track. If you want to remove the ladder from the aluminum dock frame, pry the lower tab downward with a large flat screw driver just enough to pop the hoops off while pushing the top of the handle forward over the dock.

6

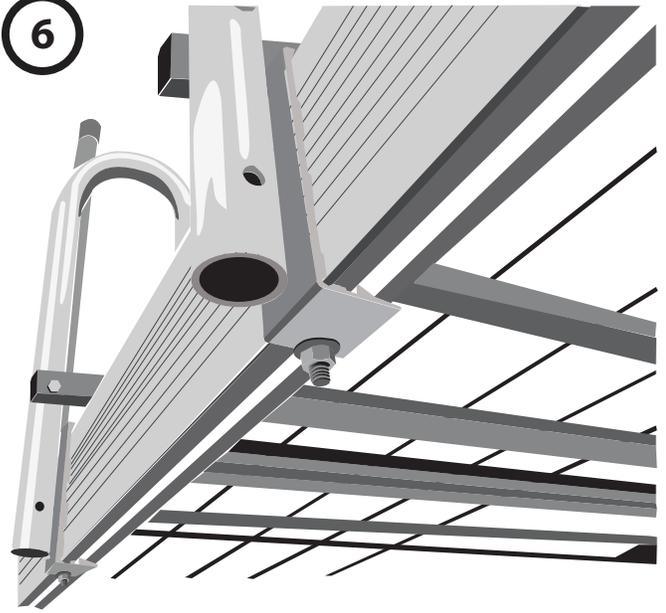


If you are satisfied with the location of your ladder, slide the carriage bolts into the notched openings on the lower tabs of the handle brackets. Secure them with a washer and a nut from your ladder bolt kit bag.

7

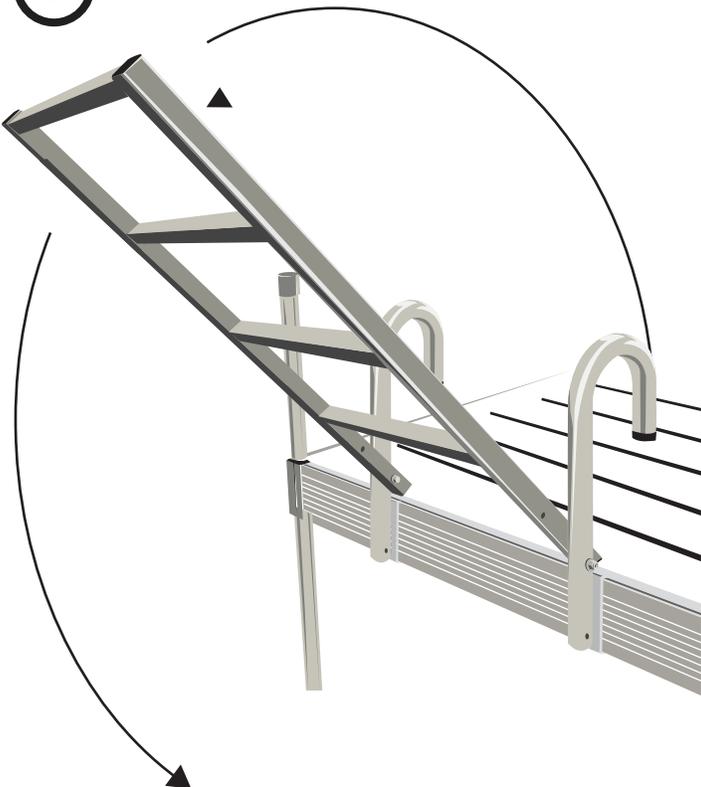

Your Ladder is easy to flip up or down when it is bolted to the ladder handles.

8

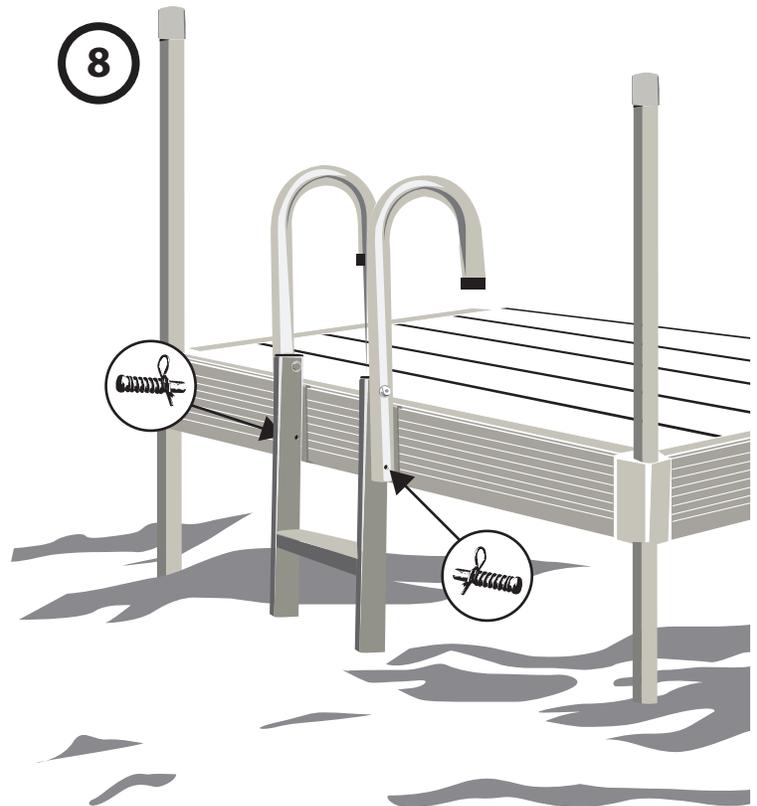

Retract the "Ladder Spring Pins" to get the ladder in the down position. You can offset the pins in the holes to hold the spring while swinging the ladder down. Release the pins from the offset position to keep the ladder from moving while in the down position.