


# Feather-LITE Bench



1. Slide two carriage bolts down the bottom track to receive the pipe bracket.



2. Apply two nylock nuts attaching the pipe bracket to the Frame of the dock.

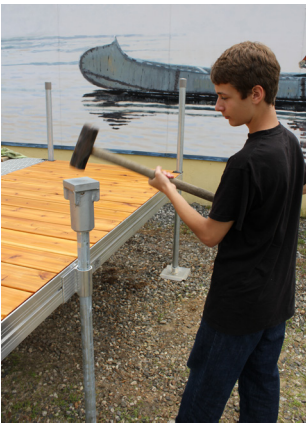


3. If the pipe bracket is in the correct position for your bench, drive a pipe through the pipe bracket into the ground then tighten the set screws and nylock nuts.



4. Attach a double socket to the top of this pipe with one side over the decking.



5. The existing dock leg is already aligned with the inner dock frame so the second double socket will mount with the open socket beside the pipe.

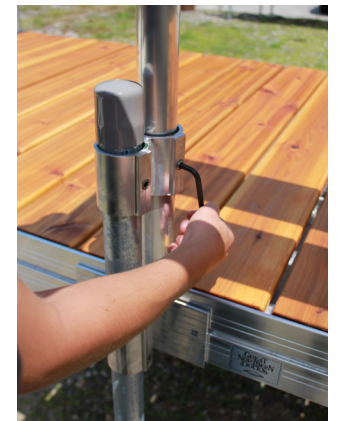

6. Set the bench legs down into the double sockets and tighten all set screws.

